



KUFSA
coatings

DESDE - SINCE 1.969



AKUAFIS LASUR

FOR EXTERIOR-INTERIOR WOOD
WATERBORNE VARNISH

BEAUTY AND
LONG-LASTING
PROTECTION
FOR WOOD





AKUAFIS LASUR

INNOVATION & SUSTAINABILITY IN WOOD TREATMENT

MAIN FEATURES:

- U.V. filters for exceptional resistance to ultraviolet rays.
- Excellent adhesion on coniferous woods.
- Smooth and uniform application with both brush and roller.
- Ideal for multiple coats and easily repainted.
- Formulated with high-quality, weather-resistant, clear iron oxides.
- Natural finish thanks to its open-pore Lasur formula.
- Quick-drying for greater efficiency.
- The different shades of **AKUAFIS LASUR** can be mixed with each other.
- Eco-friendly and water-soluble, minimizing environmental impact.

Application Instructions for **AKUAFIS LASUR**:

For optimal results, it's essential to start by shaking the product well. Make sure that the wood surface is clean, dry and previously sanded to facilitate maximum absorption of **AKUAFIS LASUR**. The application can be done using a paint brush, roller or paint gun, depending on your preference. If dilution is needed, it is recommended to add 5-10% water, which will allow for a more uniform and efficient application.

Before applying **AKUAFIS-LASUR**, please take into account:



The application temperature and the substrate to be applied must be between 5 and 35°C both in application and drying.




The wood should be dry (minus 20% RH) and clean of dust, grease and exudate.



Do not apply on rainy and windy days.

Application Process:

Sand the wood with 80-120 grit.



Apply the first coat 100 g/m².



Allow to dry for 1 hour.



Apply the second coat 100 g/m².



Wait a minimum of 24 hours before handling.





AKUAFIS LASUR

PROTECTION AND ELEGANCE FOR YOUR WOOD



Ideal for Outdoors and Interiors, from Doors and Frames to Street Furniture and Wooden Structures

Discover **AKUAFIS LASUR**, the perfect water-based solution, with high-strength acrylic resins to protect and beautify wood. Its advanced formula with U.V. filters offers exceptional protection from the sun, while its pigments provide a beautiful satin finish. And its ability to repel water ensures greater durability and conservation of wood in any climate.


AVAILABLE SHADES:




NATURAL. Ref. WON8802K




PINE. Ref. WON2805K

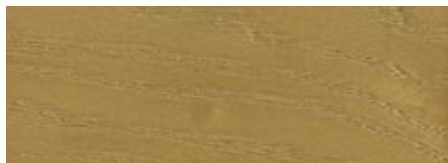

OAK. Ref. WON3802K

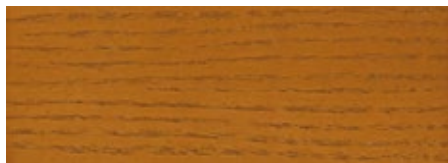

TEAK. Ref. WON6802K

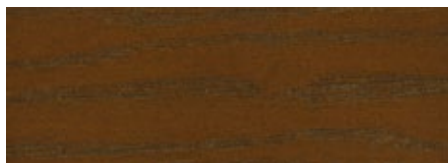

WALNUT. Ref. WON7803K



WENGUE. Ref. WON9801K

SALES FORMATS

0,75 Kg / 4 Kg / 25 Kg

CADUCITY

2 YEARS



KUPSA
c o a t i n g s

DESDE - SINCE 1.969

Apto. de Correos 1081.
26080 Logroño (La Rioja)
Tel.: +34 945 622 222
kupsa04@kupsa.es
www.kupsa.es

